



Manual

1



2

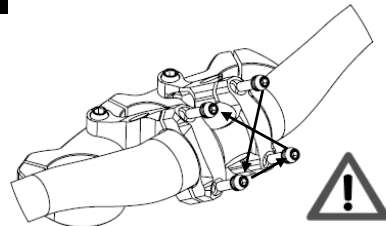


1. Place the stem on the fork top crown and tighten the 4 screws **successively in steps forming a cross up to 9.5 Nm.**

2. Be careful the handlebar is dry and free of grease; orient it in your preferred position then tighten the 4 screws **successively in steps forming a cross up to 5.5 Nm.**

3. After tightening, it must appear identical play at the top and bottom of the stem.

ENJOY !

3

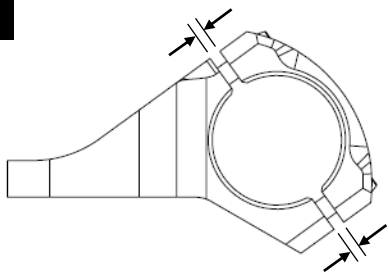

Warning

Do not use shorter screws. If you wish to replace the screws, please contact your Cydonia dealer.

Maintenance

Periodically check the tightening of the screws. Be careful not to over tighten the screws. Periodically apply some grease to the threads of the screws. Periodically inspect your components, especially after a crash. If you find anything suspicious, go to your Cydonia dealer or contact us directly from our website.

Warranty

All Cydonia components are warranted 1 (one) year from the date of purchase against defects in workmanship and materials. This warranty is limited to the first purchaser. Proof of purchase is required. The product must be returned to its place of purchase or to us directly to process any warranty claim. This warranty does not cover defects resulting from improper or abusive use, modification, lack of preventive maintenance or routine maintenance or failure to comply with assembly instructions and appropriate procedures, and products used in competition or for commercial purposes. No compensation can be claimed as damages for any reason. The guarantee does not cover the de-colorization of the colors.



www.cydonia-bicycles.com